
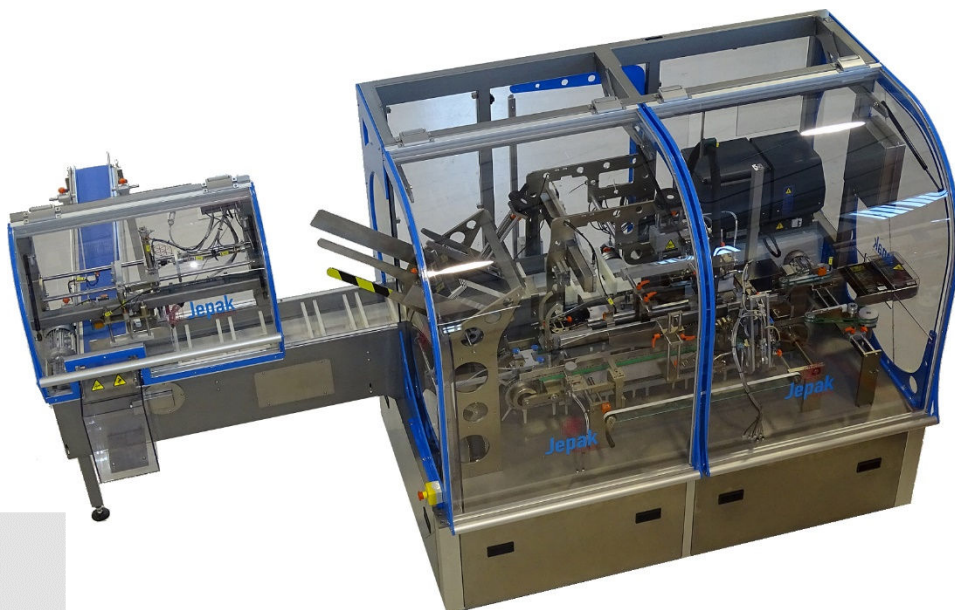
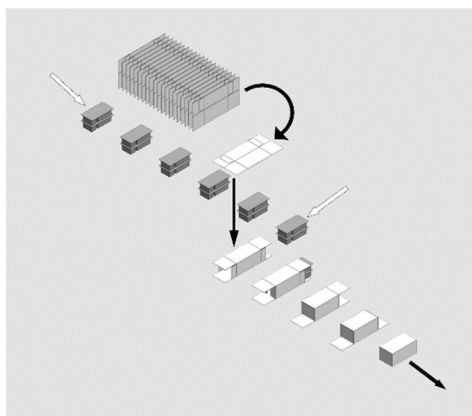
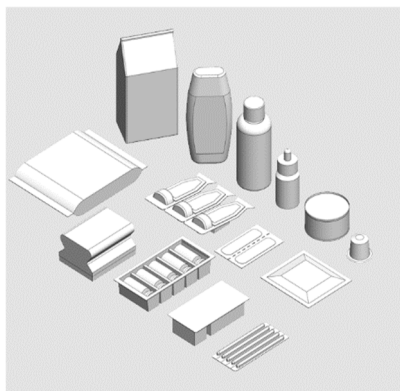


DATOS TÉCNICOS		ih 115	ih-135	ih-150	ih-200
Producción	estuches/minuto	30-60	30-55	30-45	30-40
Potencia	kW	1,5 (Hot-melt + 3,5)	1,5 (Hot-melt + 3,5)	1,5 (Hot-melt + 3,5)	1,5 (Hot-melt + 3,5)
Consumo aire	NI/min	400	400	400	400
Presión aire	bar	5-6	5-6	5-6	5-6
Peso	kg	900	1.000	1.100	1.200
W	mm	1.000	1.000	1.000	1.000
L	mm	2.800	3.100	3.450	4.050
S	mm	2.000	2.200	2.450	2.800

Estuche	ih-115	min.	max.	ih-135	min.	max.	ih-150	min.	max.	ih-200	min.	max.
A		25	110		65	135		70	150		80	200
B		20	80		25	80		25	80		25	100
C		100	160		100	160		100	160		90	160
A + B		-	190		-	215		-	230		-	300



Algunos opcionales

Codificación / loteado estuche	Cerrado estuche por Hot-Melt
Alimentación manual o automática producto	Cerrado estuche por pestaña insertada
Alimentación prospectos	Detector falta producto